
Gametine VISTAR®pe 6269SP SPECIFICATION



VISTAR®PE VistaRope Race 8 Drawing



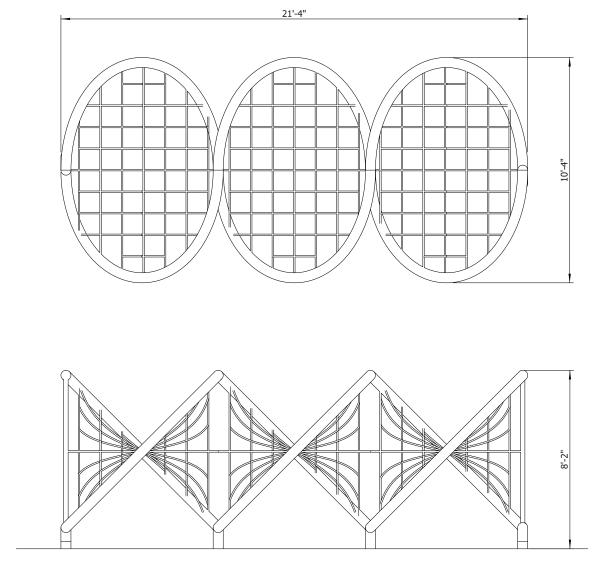

Product Name: Model Number: Size:	VistaRope Race 8 6269SP Length: 21' 4" Width: 10' 4" Height: 8' 2"
Fall Height:	7'
Foundations:	4
Concrete Volume:	2.6 cubic yards
COMPLIANT	ASTM F-1487
WITH:	CSA Z614
Ages: Use Zone:	5-12 years Length: 33' 4" Width: 22' 4"



Technical Details:	
Support Post	Support Posts shall be 5-1/2" (140mm) diameter steel tubing. After fabrication the frame shall be powder coated in accordance with the specifications herein.
Climbing Nets	20mm diameter rope consists of 6 main strands, each strand containing 24 galvanized steel reinforcing strands within a polyamide sleeve, wrapped around a solid polyamide core for a total of 144 reinforcing strands. Ropes shall achieve a Class 7-8 colorfastness rating.
Rope Ball Con- nectors and End Fittings	One-piece compressed aluminum ball connector or end fitting, compressed in place with 150,000 pounds source (667kN) to prevent the connection from moving and causing premature cable wear.
Fasteners	All fasteners shall be stainless steel with locking patch or locking compound (by others).
Metal Finish	Polyester (Powder) Coating – The polyester coating shall be uniformly applied by the electro- static method to a minimum thickness of four mils. Promptly after application of the powder, the coating shall be oven-cured at 350 degrees Fahrenheit. The color(s) of the polyester coating shall be from the manufacturer's standard color selection.
Installation	Installation recommended by a licensed playground contractor, trained and certified on the applicable playground installation methods and standards, preferably certified by manufacturer or National Playground Contractors Association.