


|                         |  |
|-------------------------|--|
| <b>Product Name:</b>    | <b>VistaAdventure Course 6</b>                   |
| <b>Model Number:</b>    | <b>5956SP</b>                                    |
| <b>Size:</b>            | Length: 32' 5"<br>Width: 31' 2"<br>Height: 9' 1" |
| <b>Fall Height:</b>     | 7'   |
| <b>Foundations:</b>     | 14   |
| <b>Concrete Volume:</b> | 4.15 cubic yards ASTM                            |
| <b>COMPLIANT WITH:</b>  | F-1487<br>CSA Z614                               |
| <b>Ages:</b>            | 5-12 years                                       |
| <b>Use Zone:</b>        | Length: 44' 5"<br>Width: 43' 2"                  |

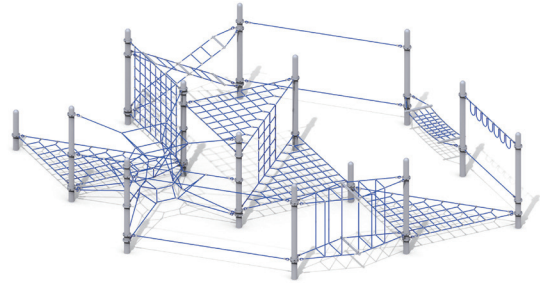

**Technical Details:**

**Support Post**

Support Posts shall be 5-1/2" (140mm) diameter steel tubing. After fabrication the frame shall be powder coated in accordance with the specifications herein.

**Climbing Nets**

20mm diameter rope consists of 6 main strands, each strand containing 24 galvanized steel reinforcing strands within a polyamide sleeve, wrapped around a solid polyamide core for a total of 144 reinforcing strands. Ropes shall achieve a Class 7-8 colorfastness rating.

**Rope Ball Connectors and End Fittings**

One-piece compressed aluminum ball connector or end fitting, compressed in place with 150,000 pounds source (667kN) to prevent the connection from moving and causing premature cable wear.

**Fasteners**

All fasteners shall be stainless steel with locking patch or locking compound (by others).

**Metal Finish**

Polyester (Powder) Coating – The polyester coating shall be uniformly applied by the electrostatic method to a minimum thickness of four mils. Promptly after application of the powder, the coating shall be oven-cured at 350 degrees Fahrenheit. The color(s) of the polyester coating shall be from the manufacturer's standard color selection.

**Installation**

Installation recommended by a licensed playground contractor, trained and certified on the applicable playground installation methods and standards, preferably certified by manufacturer or National Playground Contractors Association.